

CIR-CON-0006 (80.25-82.25 MHz, 5kW)

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	80.25		82.25	MHz
Impedance	Z ₀		50		Ω
Insertion Loss	IL		0.25	0.4	dB
Isolation	ISO	18	23		dB
Return Loss	RL	18	23		dB
Peak Handling Power	P	5.0			kW
Rotation	Ro	Counterclockwise [†]			-

[†] Clockwise is available


MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions (Except Connectors)	250 x 230 x 90	mm	Max.
Weight	13	kg	Typ.
RF Connectors	EIA 1-5/8" x3	-	
Cooling	Water Cooling	-	
Water In/Out Fitting	PT1/4	-	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T	15		50	°C
Water Temperature	T _w	15		30	°C
Water Pressure	P _w		3	10	bar

OUT DRAWING

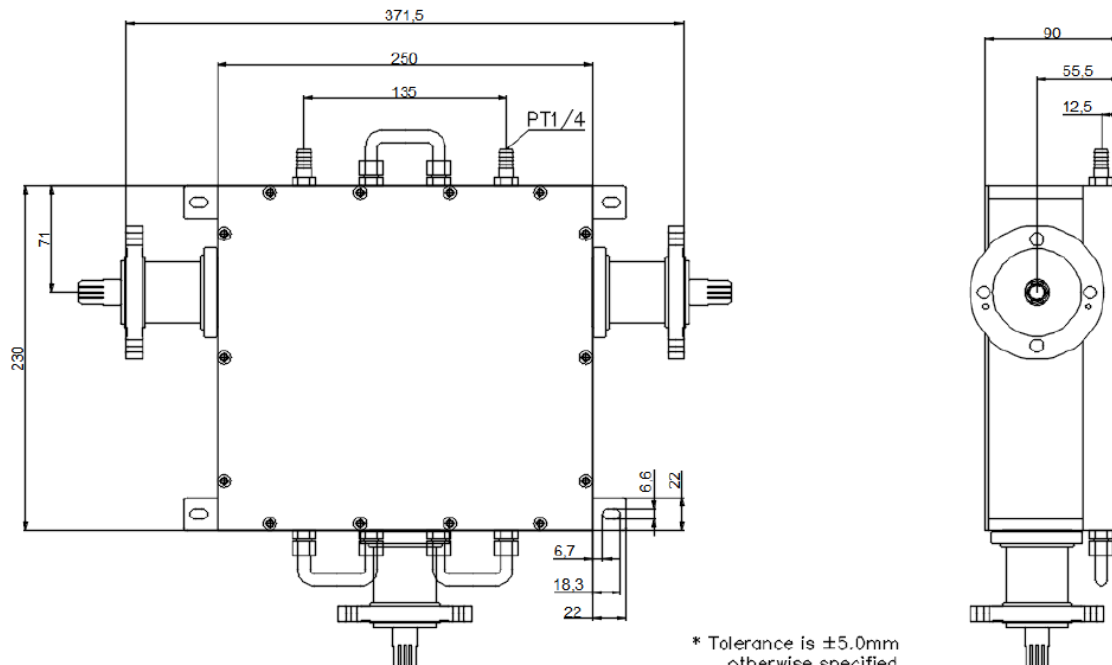

* Tolerance is ±5.0mm
otherwise specified.